


SPL Male Elbow Swivel - Stainless Steel Push to Connect Fittings

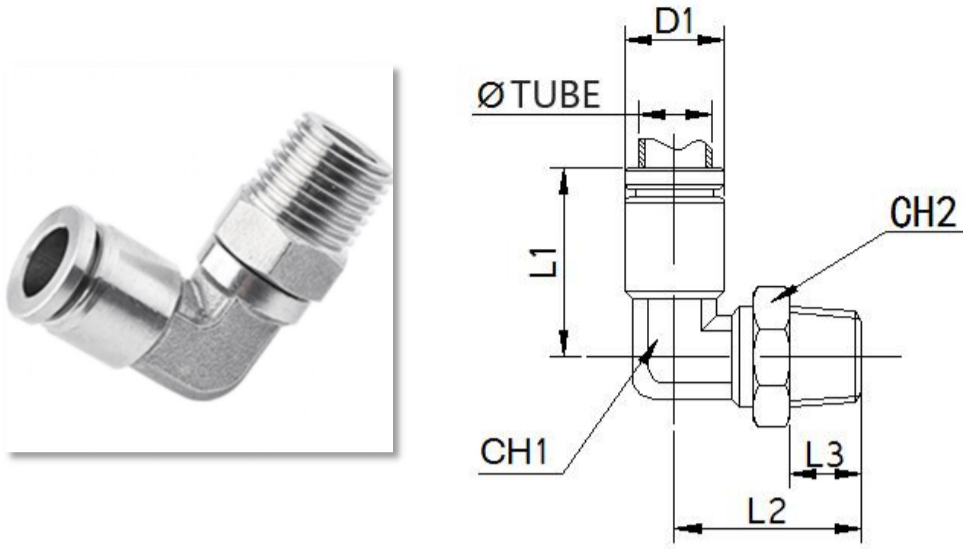

Material: 316 Stainless Steel

Fluid Admitted: Air, Water, Steam, and Other Liquid

Working Pressure: 0~2.0MPa | 0~290psi

Proof Pressure: 3.0Mpa | 435psi

Negative Pressure: -100Kpa | -29.5 In Hg

Working Temperature: 20~150°C | -4~302°F

Applicable Tube: PU / PA / Teflon Tubing

Seal, O-ring: FKM (Viton)

Metric Tubing to R, BSPT Thread Male Elbow Swivel Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	R	L1(mm)	L2(mm)	L3(mm)	D1(mm)	CH1(mm)	CH2(mm)
SPL 04-M5	4	M5	17	19	4	10.5	9.2	11
SPL 04-01	4	R1/8	17	23	8	10.5	9.2	11
SPL 04-02	4	R1/4	17	25	11	10.5	9.2	14
SPL 06-M5	6	M5	24	25	4	12.5	9.2	11
SPL 06-01	6	R1/8	24	25	8	12.5	9.2	11
SPL 06-02	6	R1/4	24	27	11	12.5	9.2	14
SPL 06-03	6	R3/8	24	28	11	12.5	9.2	17
SPL 06-04	6	R1/2	24	30	14	12.5	9.2	22
SPL 08-01	8	R1/8	27	25	8	14.5	11.2	14
SPL 08-02	8	R1/4	27	27	11	14.5	11.2	14
SPL 08-03	8	R3/8	27	28	11	14.5	11.2	17
SPL 08-04	8	R1/2	27	30	14	14.5	11.2	22
SPL 10-02	10	R1/4	30.5	28	11	17.5	13.2	17
SPL 10-03	10	R3/8	30.5	29	11	17.5	13.2	17
SPL 10-04	10	R1/2	30.5	31	14	17.5	13.2	22
SPL 12-02	12	R1/4	34	30.5	11	20.5	15.5	19
SPL 12-03	12	R3/8	34	31.5	11	20.5	15.5	19
SPL 12-04	12	R1/2	34	33.5	14	20.5	15.5	22
SPL 14-02	14	R1/4	37	32	11	22	20.6	22
SPL 14-03	14	R3/8	37	33	11	22	20.6	22
SPL 14-04	14	R1/2	37	35	14	22	20.6	22
SPL 16-02	16	R1/4	38	32	11	24	20.6	22
SPL 16-03	16	R3/8	38	33	11	24	20.6	22
SPL 16-04	16	R1/2	38	35	14	24	20.6	22

Inch Tubing to R, BSPT Thread Male Elbow Swivel Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	R	L1(mm)	L2(mm)	L3(mm)	D1(mm)	CH1(mm)	CH2(mm)
SPL 5/32-M5	5/32"	M5	17	19	4	10.5	9.2	11
SPL 5/32-01	5/32"	R1/8	17	23	8	10.5	9.2	11
SPL 5/32-02	5/32"	R1/4	17	25	11	10.5	9.2	14
SPL 1/4-M5	1/4"	M5	24	25	4	12.5	9.2	11
SPL 1/4-01	1/4"	R1/8	24	25	8	12.5	9.2	11
SPL 1/4-02	1/4"	R1/4	24	27	11	12.5	9.2	14
SPL 1/4-03	1/4"	R3/8	24	28	11	12.5	9.2	17
SPL 1/4-04	1/4"	R1/2	24	30	14	12.5	9.2	22
SPL 5/16-01	5/16"	R1/8	27	25	8	14.5	11.2	14
SPL 5/16-02	5/16"	R1/4	27	27	11	14.5	11.2	14
SPL 5/16-03	5/16"	R3/8	27	28	11	14.5	11.2	17
SPL 5/16-04	5/16"	R1/2	27	30	14	14.5	11.2	22
SPL 3/8-02	3/8"	R1/4	30.5	28	11	17.5	13.2	17
SPL 3/8-03	3/8"	R3/8	30.5	29	11	17.5	13.2	17
SPL 3/8-04	3/8"	R1/2	30.5	31	14	17.5	13.2	22
SPL 1/2-02	1/2"	R1/4	34	30.5	11	20.5	15.5	19
SPL 1/2-03	1/2"	R3/8	34	31.5	11	20.5	15.5	19
SPL 1/2-04	1/2"	R1/2	34	33.5	14	20.5	15.5	22

Inch Tubing to NPT Thread Male Elbow Swivel Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	R	L1(mm)	L2(mm)	L3(mm)	D1(mm)	CH1(mm)	CH2(mm)
SPL 5/32-U10	5/32"	10-32 UNF	17	19	4	10.5	9.2	11
SPL 5/32-N01	5/32"	1/8 NPT	17	23	8	10.5	9.2	11
SPL 5/32-N02	5/32"	1/4 NPT	17	25	11	10.5	9.2	14
SPL 1/4-U10	1/4"	10-32 UNF	24	25	4	12.5	9.2	11
SPL 1/4-N01	1/4"	1/8 NPT	24	25	8	12.5	9.2	11
SPL 1/4-N02	1/4"	1/4 NPT	24	27	11	12.5	9.2	14
SPL 1/4-N03	1/4"	3/8 NPT	24	28	11	12.5	9.2	17
SPL 1/4-N04	1/4"	1/2 NPT	24	30	14	12.5	9.2	22
SPL 5/16-N01	5/16"	1/8 NPT	27	25	8	14.5	11.2	14
SPL 5/16-N02	5/16"	1/4 NPT	27	27	11	14.5	11.2	14
SPL 5/16-N03	5/16"	3/8 NPT	27	28	11	14.5	11.2	17
SPL 5/16-N04	5/16"	1/2 NPT	27	30	14	14.5	11.2	22
SPL 3/8-N02	3/8"	1/4 NPT	30.5	28	11	17.5	13.2	17
SPL 3/8-N03	3/8"	3/8 NPT	30.5	29	11	17.5	13.2	17
SPL 3/8-N04	3/8"	1/2 NPT	30.5	31	14	17.5	13.2	22
SPL 1/2-N02	1/2"	1/4 NPT	34	30.5	11	20.5	15.5	19
SPL 1/2-N03	1/2"	3/8 NPT	34	31.5	11	20.5	15.5	19
SPL 1/2-N04	1/2"	1/2 NPT	34	33.5	14	20.5	15.5	22

Metric Tubing to NPT Thread Male Elbow Swivel Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	R	L1(mm)	L2(mm)	L3(mm)	D1(mm)	CH1(mm)	CH2(mm)
SPL 04-U10	4	10-32 UNF	17	19	4	10.5	9.2	11
SPL 04-N01	4	1/8 NPT	17	23	8	10.5	9.2	11
SPL 04-N02	4	1/4 NPT	17	25	11	10.5	9.2	14
SPL 06-U10	6	10-32 UNF	24	25	4	12.5	9.2	11
SPL 06-N01	6	1/8 NPT	24	25	8	12.5	9.2	11
SPL 06-N02	6	1/4 NPT	24	27	11	12.5	9.2	14
SPL 06-N03	6	3/8 NPT	24	28	11	12.5	9.2	17
SPL 06-N04	6	1/2 NPT	24	30	14	12.5	9.2	22
SPL 08-N01	8	1/8 NPT	27	25	8	14.5	11.2	14
SPL 08-N02	8	1/4 NPT	27	27	11	14.5	11.2	14
SPL 08-N03	8	3/8 NPT	27	28	11	14.5	11.2	17
SPL 08-N04	8	1/2 NPT	27	30	14	14.5	11.2	22
SPL 10-N02	10	1/4 NPT	30.5	28	11	17.5	13.2	17
SPL 10-N03	10	3/8 NPT	30.5	29	11	17.5	13.2	17
SPL 10-N04	10	1/2 NPT	30.5	31	14	17.5	13.2	22
SPL 12-N02	12	1/4 NPT	34	30.5	11	20.5	15.5	19
SPL 12-N03	12	3/8 NPT	34	31.5	11	20.5	15.5	19
SPL 12-N04	12	1/2 NPT	34	33.5	14	20.5	15.5	22
SPL 14-N02	14	1/4 NPT	37	32	11	22	20.6	22
SPL 14-N03	14	3/8 NPT	37	33	11	22	20.6	22
SPL 14-N04	14	1/2 NPT	37	35	14	22	20.6	22
SPL 16-N02	16	1/4 NPT	38	32	11	24	20.6	22
SPL 16-N03	16	3/8 NPT	38	33	11	24	20.6	22
SPL 16-N04	16	1/2 NPT	38	35	14	24	20.6	22