


SPLF-G Female Elbow Swivel - BSPP, G Thread Stainless Steel Push to Connect Fittings

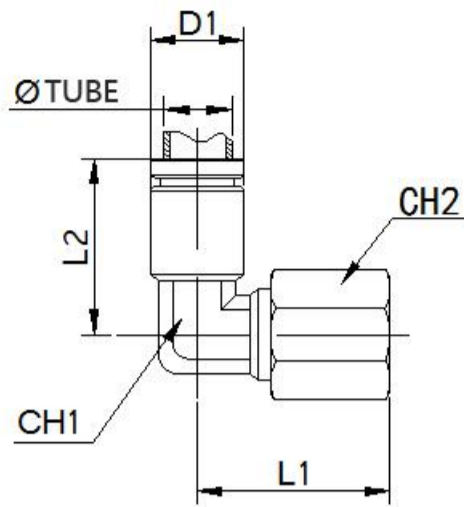

Material: 316 Stainless Steel

Fluid Admitted: Air, Water, Steam, and Other Liquid

Working Pressure: 0~2.0MPa | 0~290psi

Proof Pressure: 3.0Mpa | 435psi

Negative Pressure: -100Kpa | -29.5 In Hg

Working Temperature: 20~150°C | -4~302°F

Applicable Tube: PU / PA / Teflon Tubing

Seal, O-ring: FKM (Viton)

Metric Tubing to G, BSP, BSPP Thread Female Elbow Swivel Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	G	L1(mm)	L2(mm)	D1(mm)	CH1(mm)	CH2(mm)
SPLF 04-G01	4	G1/8	27.5	17	10.5	9.2	12
SPLF 04-G02	4	G1/4	29.5	17	10.5	9.2	17
SPLF 06-G01	6	G1/8	27	24	12.5	9.2	12
SPLF 06-G02	6	G1/4	28	24	12.5	9.2	17
SPLF 06-G03	6	G3/8	30	24	12.5	9.2	19
SPLF 06-G04	6	G1/2	25	24	12.5	9.2	24
SPLF 08-G01	8	G1/8	27	27	14.5	11.2	14
SPLF 08-G02	8	G1/4	28	27	14.5	11.2	17
SPLF 08-G03	8	G3/8	30	27	14.5	11.2	19
SPLF 08-G04	8	G1/2	28	27	14.5	11.2	24
SPLF 10-G02	10	G1/4	29	30.5	17.5	13.2	17
SPLF 10-G03	10	G3/8	30	30.5	17.5	13.2	19
SPLF 10-G04	10	G1/2	30.5	30.5	17.5	13.2	24
SPLF 12-G02	12	G1/4	31.5	34	20.5	15.5	19
SPLF 12-G03	12	G3/8	33.5	34	20.5	15.5	19
SPLF 12-G04	12	G1/2	32	34	20.5	15.5	24
SPLF 14-G02	14	G1/4	33	37	22	20.6	22
SPLF 14-G03	14	G3/8	35	37	22	20.6	22
SPLF 14-G04	14	G1/2	32	37	22	20.6	24
SPLF 16-G02	16	G1/4	33	38	24	20.6	22
SPLF 16-G03	16	G3/8	35	38	24	20.6	22
SPLF 16-G04	16	G1/2	32	38	24	20.6	24

Inch Tubing to G, BSP, BSPP Thread Female Elbow Swivel Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	G	L1(mm)	L2(mm)	D1(mm)	CH1(mm)	CH2(mm)
SPLF 5/32-G01	5/32"	G1/8	27.5	17	10.5	9.2	12
SPLF 5/32-G02	5/32"	G1/4	29.5	17	10.5	9.2	17
SPLF 1/4-G01	1/4"	G1/8	27	24	12.5	9.2	12
SPLF 1/4-G02	1/4"	G1/4	28	24	12.5	9.2	17
SPLF 1/4-G03	1/4"	G3/8	30	24	12.5	9.2	19
SPLF 1/4-G04	1/4"	G1/2	25	24	12.5	9.2	24
SPLF 5/16-G01	5/16"	G1/8	27	27	14.5	11.2	14
SPLF 5/16-G02	5/16"	G1/4	28	27	14.5	11.2	17
SPLF 5/16-G03	5/16"	G3/8	30	27	14.5	11.2	19
SPLF 5/16-G04	5/16"	G1/2	28	27	14.5	11.2	24
SPLF 3/8-G01	3/8	G1/4	29	30.5	17.5	13.2	17
SPLF 3/8-G02	3/8	G3/8	30	30.5	17.5	13.2	19
SPLF 3/8-G03	3/8	G1/2	30.5	30.5	17.5	13.2	24
SPLF 3/8-G04	3/8	G1/4	31.5	34	20.5	15.5	19
SPLF 1/2-G02	1/2"	G3/8	33.5	34	20.5	15.5	19
SPLF 1/2-G03	1/2"	G1/2	32	34	20.5	15.5	24