


SPY Union Y - Stainless Steel Push to Connect Fittings

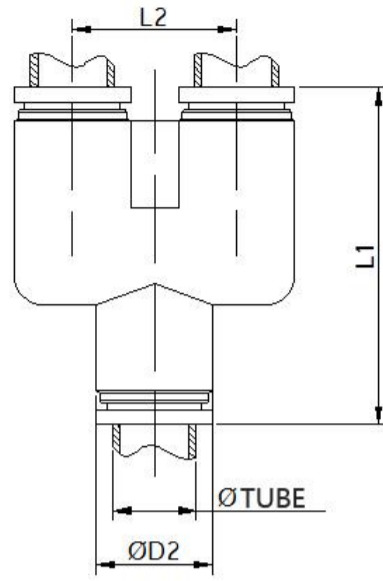

Material: 316 Stainless Steel
Fluid Admitted: Air, Water, Steam, and Other Liquid
Working Pressure: 0~2.0MPa | 0~290psi
Proof Pressure: 3.0Mpa | 435psi
Negative Pressure: -100Kpa | -29.5 In Hg
Working Temperature: 20~150°C | -4~302°F
Applicable Tube: PU / PA / Teflon Tubing
Seal, O-ring: FKM (Viton)

Metric / Inch Tubing Union Y Stainless Steel Push to Connect Fittings

PART NO.	Tube ØD	L1(mm)	L2(mm)	D2(mm)
SPY 04	4	38	12	9
SPY 06	6	42	14	11
SPY 08	8	46	16	13.6
SPY 10	10	51	20	15.6
SPY 12	12	60	24	18.6
SPY 5/32	5/32"	38	12	9
SPY 1/4	1/4"	42	14	11
SPY 5/16	5/16"	46	16	13.6
SPY 3/8	3/8"	51	20	15.6
SPY 1/2	1/2"	60	24	18.6